

# Industrial Vacuum Accessories




# Nilfisk Industrial Vacuum Accessory Catalog

This catalog highlights the most popular Nilfisk industrial vacuum accessories. The guide below makes finding the most appropriate accessory easy – from filtration and collection down to finishing tools.

The range of accessories is extensive and updated continuously, therefore this catalog cannot show the entire Nilfisk product offering. Contact your local sales manager, call 1-800-NILFISK or email [USPAemailorders@nilfisk.com](mailto:USPAemailorders@nilfisk.com) to find a full range of accessories.

- A** Filtration – *pg. 3*
- B** Collection – *pg. 3*
- C** Inlet & Accessory Couplers – *pg. 4*
- D** Hoses & Cuffs – *pg. 5*
- E** Wands & Fittings – *pg. 6*
- F** Brushes – *pg. 7*
- G** Finishing Tools – *pg. 8*
- H** Floor Nozzles – *pg. 9*
- I** Explosion-Proof / Dust Ignition-Proof Accessories – *pg. 10*
- J** Overhead Cleaning Kits – *pg. 11*
- K** Hot Oven Cleaning Kit – *pg. 11*

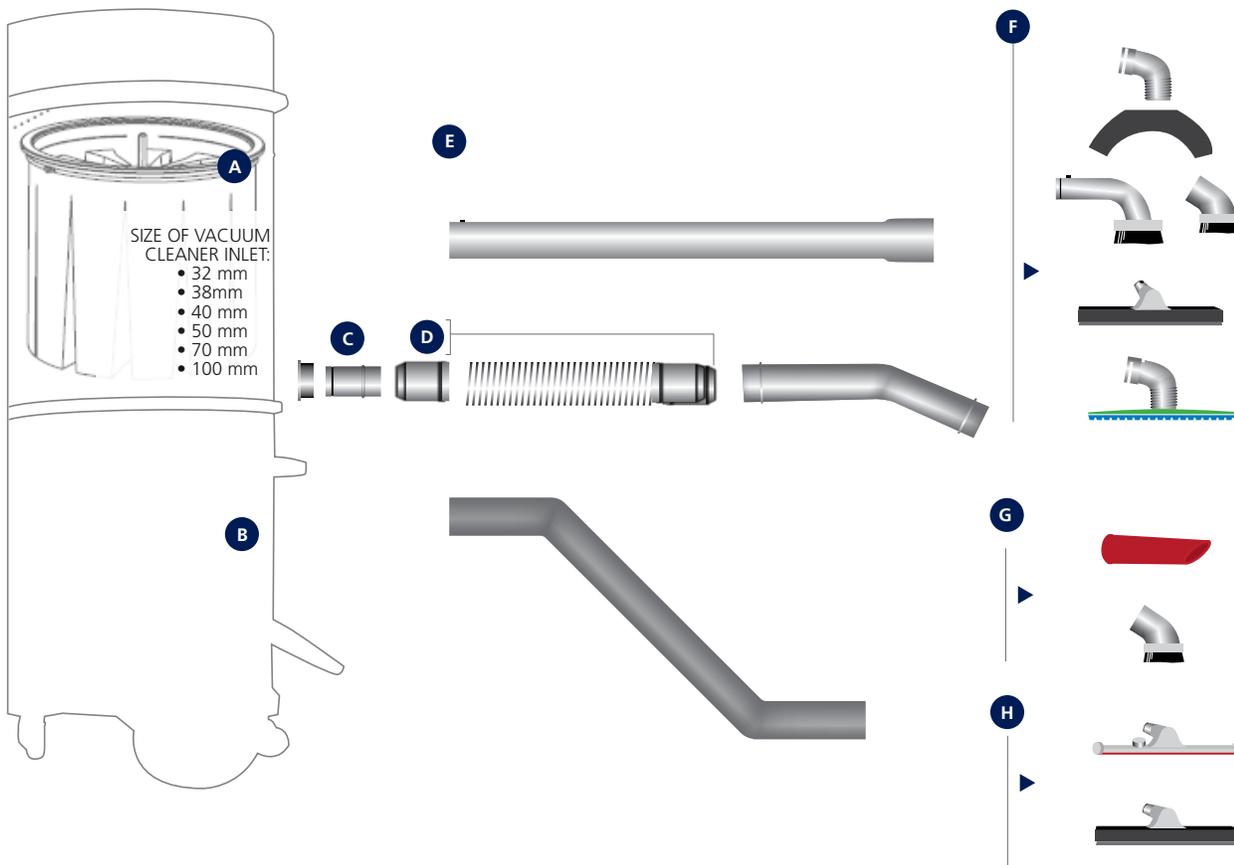

**Reminder:** Only the most popular accessories are represented. Contact us for additional diameters, materials and more.

# A. Filtration

Efficient filtration is critical to the success of your industrial vacuum cleaner. Nilfisk uses the highest quality filters designed to safely collect nuisance and hazardous materials. A multi-stage, graduated filtration system is built into every Nilfisk vacuum, which can include a collection bag, main filter, microfilter, and HEPA or ULPA filtration.

**Filter options vary by vacuum and application. Please contact your local sales manager, call 1-800-NILFISK or email [USPAemailorders@nilfisk.com](mailto:USPAemailorders@nilfisk.com) to inquire about the right filter for your needs.**

|  |   |  |   |
|--|---|--|---|
|   |    |  |                        |
| <p><b>Star Filters</b><br/>Available in polyester, polyester and polyurethane blend, Nomex®, PTFE, antistatic, and various sizes</p> | <p><b>Bag Filters</b><br/>Available in polyester, polyester and polyurethane blend, Nomex®, PTFE, antistatic, and various sizes</p> | <p><b>Cartridge Filters</b><br/>Available in antistatic polyester and PTFE</p>     | <p><b>HEPA / ULPA Filters</b><br/>Upstream and downstream HEPA and ULPA filters and installation kits</p> |

# B. Collection

Nilfisk offers a variety of collection options to aid in filtration and help contain toxic materials. If you are vacuuming dust or powders, it is imperative to consider collection and disposal so you do not risk contact with potent materials or put debris back into the air.

**Collection options vary by vacuum and application. Please contact your local sales manager, call 1-800-NILFISK or email [USPAemailorders@nilfisk.com](mailto:USPAemailorders@nilfisk.com) to inquire about the right collection option for your needs.**

|  |   |   |
|--|---|---|
|                 |   |    |
| <p><b>Collection Bags</b><br/>Available in paper and synthetic materials, and in various sizes</p> | <p><b>Container Liners</b><br/>Available in standard and conductive materials, and in various sizes; requires liner adapter kit</p> | <p><b>SAFE-PAK™ Collection Container</b><br/>Disposable HEPA-filtered collection container for safe removal of potent compounds; available in various sizes</p> |

## C. Inlet & Accessory Couplers

| Inlet Coupler   | Description   | Fitment Diameter (mm) | Galvanized Steel | Stainless Steel | Part #  | Notes                                       |
|---|---------------|-----------------------|------------------|-----------------|---------|---|
|  | Inlet Coupler | 40                    | •                |                 | 7-21005 | (1) internal flange;<br>(1) external flange |
|   |               |                       | •                |                 | 7-22229 |   |
|   |               | 50                    | •                |                 | 7-21003 |   |
|   |               |                       |                  | •               | 7-22230 |   |
|   |               | 70                    | •                |                 | 7-21001 |   |
|   |               |                       |                  | •               | 7-22231 |   |

\*Inlet coupler with flow regulator or quick-disconnect also available. Contact customer service for more information.

| Accessory Coupler   | Description       | Fitment Diameter (mm) | Galvanized Steel | Stainless Steel | Part #   | Notes                |
|---|-------------------|-----------------------|------------------|-----------------|----------|----------------------|
|  | Accessory Coupler | 38                    | •                |                 | 01719620 | no flanges           |
|   |                   | 40                    | •                |                 | 7-21004  | (2) external flanges |
|   |                   |                       |                  |                 | •        |                      |
|   |                   | 50                    | •                |                 | 7-21002  |                      |
|   |                   |                       |                  |                 | •        |                      |
|   |                   | 70                    | •                |                 | 7-21000  |                      |
|   |                   |                       | •                | 7-22242         |          |                      |

\*Accessory coupler with 90-degree angle also available. Contact customer service for more information.

| Inlet Coupler with Reduction  | Description   | Fitment Diameter (mm) | Galvanized Steel | Stainless Steel | Part #  | Notes                                    |
|---|---------------|-----------------------|------------------|-----------------|---------|--|
|  | Inlet Reducer | 50-40                 | •                |                 | 7-22000 | (1) internal flange; (1) external flange |
|   |               |                       | •                |                 | 7-22223 |  |
|   |               | 70-40                 | •                |                 | 7-22309 |  |
|   |               |                       |                  |                 | •       |  |
|   |               | 70-50                 | •                |                 | 7-22001 |  |
|   |               |                       |                  |                 | •       |  |
|   |               | •                     | 7-22225          |                 |         |  |

\*Inlet reducers with flow regulation and various sizes also available. Contact customer service for more information.

| Multi-User Coupler  | Description                               | Fitment Diameter (mm) | Galvanized Steel | Stainless Steel | Part #  | Notes               |
|---|---|-----------------------|------------------|-----------------|---------|---------------------|
|  | Y-Connector<br>(Bifurcation w/ reduction) | 50-40-40              | •                |                 | 7-22060 | (1) internal flange |
|   |   | 70-40-40              | •                |                 | 7-22111 |                     |
|   |   | 70-50-50              | •                |                 | 7-22064 |                     |

## D. Hoses & Cuffs

| Standard Gray Plastic Hose & Cuffs  | Description                   | Fitment Diameter (mm) | Bend Radius (in.) | Temp. Rating °F | Part #   | Notes   |
|---|-------------------------------|-----------------------|-------------------|-----------------|----------|---|
|  | Gray Plastic Hose (per meter) | 38                    | 6.50              | -30 / 140       | 81813800 | Ethyl vinyl acetate construction; for general-purpose use. Max. order length: 15 meters             |
|   |                               | 50                    | 8.50              | -30 / 140       | 81815000 |   |
|   |                               | 70                    | 9.84              | 5 / 140         | 7-24026  | Plastic-coated PVC w/ smooth lining for dust & non-abrasive materials. Max. order length: 15 meters |
|   | Gray Plastic Hose Cuff        | 38                    | -                 | -               | 01719615 | Use with 81813800 hose  |
|   |                               | 50                    | -                 | -               | 01746306 | Use with 81815000 hose  |
|   |                               | 70                    | -                 | -               | 7-20003  | Use with 7-24026 hose   |

\*Hoses are also available in standard lengths with cuffs attached. Contact customer service for more information.

| Antistatic Hose & Cuffs  | Description                        | Fitment Diameter (mm) | Bend Radius (in.) | Temp. Rating °F | Part #   | Notes  |
|--|------------------------------------|-----------------------|-------------------|-----------------|----------|--|
|  | 15' Black Antistatic Hose w/ Cuffs | 38                    | 5.00              | -30 / 140       | 01716215 | Carbon-impregnated ethyl vinyl acetate construction; 10 <sup>3</sup> - 10 <sup>6</sup> ohms resistance. Max. order length: 15 meters |
|  | Black Antistatic Hose (per meter)  |                       |                   |                 | 01716200 |  |
|  | 20' Black Antistatic Hose w/ Cuffs | 50                    | 7.00              | -30 / 140       | 01716420 |  |
|  | Black Antistatic Hose (per meter)  |                       |                   |                 | 01716400 |  |
|  | Black Antistatic Hose Cuff         | 38                    | -                 | -               | 01716300 | Use with 01716200 hose   |
|  |                                    | 50                    | -                 | -               | 01716500 | Use with 01716400 hose   |

\*Swivel cuffs are also available. Contact customer service for more information.


| Food-Grade Hose & Cuffs   | Description  | Fitment Diameter (mm) | Bend Radius (in.) | Temp. Rating °F                | Part #   | Notes   |
|---|--|-----------------------|-------------------|--------------------------------|----------|---|
|  | Clear Antistatic Food-Grade Hose (per meter)                     | 40                    | 3.48              | -22 / 195; intermittent to 260 | 7-24110F | FDA-approved polyurethane construction; oil & abrasion-resistant; steel wire reinforced. Max. order length: 15 meters |
|   |  | 70                    | 4.68              |                                | 7-24112F |   |
|   | Thin-Wall (0.0275") Clear Antistatic Food-Grade Hose (per meter) | 50                    | 2.32              |                                | 01716401 |   |
|   | Thick-Wall (0.055") Clear Antistatic Food-Grade Hose (per meter) | 50                    | 3.48              |                                | 7-24111F |   |
|   | Antistatic Hose Cuff   | 40                    | -                 | -                              | 40000212 | Use with 7-24111F hose or 01716401 hose   |
|   |  | 50                    | -                 | -                              | 7-20309F | Use with 7-24110F hose  |
|   |  | 70                    | -                 | -                              | 7-20310  | Use with 7-24112F hose  |

\*Additional hose materials are available, including flexible steel and neoprene. Contact customer service for more information.

# E. Wands & Fittings

| Photo Ref.          | Description                                 | Fitment Diameter (mm) | Feature        |            |                 |            |            | Material |         |         |          |                  | Part #   | Notes                        |                                   |
|---------------------|---|-----------------------|----------------|------------|-----------------|------------|------------|----------|---------|---------|----------|------------------|----------|------------------------------|-----------------------------------|
|                     |   |                       | Overhead clean | Antistatic | Explosion-proof | Food-Grade | High Temp. | Rubber   | Plastic | Chromed | Aluminum | Galvanized steel |          |                              | Stainless steel                   |
| A                   | Double-Curved Wand                          | 40                    |                |            | •               | •          |            |          |         |         | •        |                  | 7-22026  | (1) quick-disconnect fitting |                                   |
|                     |   |                       |                |            |                 |            |            |          |         |         |          | •                | 40000215 |                              |                                   |
|                     |   | 50                    |                |            | •               | •          |            |          |         |         |          |                  | 7-22025  |                              |                                   |
|                     |   |                       |                |            |                 |            |            |          |         |         |          | •                | 40000222 |                              |                                   |
| B                   | Straight Food-Grade Aluminum Extension Wand | 38                    | •              |            | •               | •          |            |          |         |         |          | •                | 01769300 | 5' length                    |                                   |
|                     |   |                       |                |            |                 |            |            |          |         |         |          |                  | •        | 01769315                     | 10' length                        |
|                     |   | 50                    | •              |            | •               | •          |            |          |         |         |          |                  | •        | 01769320                     | 5' length                         |
|                     |   |                       | •              |            | •               | •          |            |          |         |         |          |                  | •        | 01769335                     | 10' length                        |
|                     | Curved Food-Grade Aluminum Extension Wand   | 38                    | •              |            | •               | •          |            |          |         |         |          |                  | •        | 01769310                     | Long bend for hard-to-reach areas |
|                     |   | 50                    | •              |            | •               | •          |            |          |         |         |          |                  | •        | 01769330                     |                                   |
| Compression Coupler | 38  | •                     |                | •          | •               |            |            |          |         |         |          | •                | 01769350 | Connects extension wands     |                                   |
|                     | 50  | •                     |                | •          | •               |            |            |          |         |         |          | •                | 20659000 |                              |                                   |

\*Additional wands available, including high-temperature aluminum extensions and conductive plastic. Contact customer service for more information.

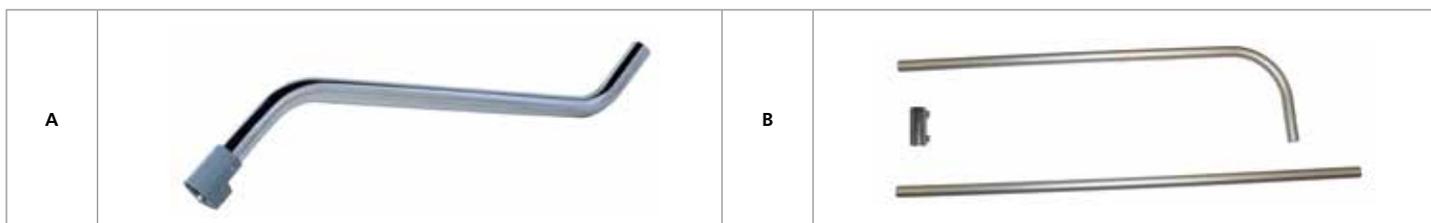

| Extension Fitting   | Description       | Fitment Diameter (mm) | Galvanized Steel | Stainless Steel | Part #     | Notes  |
|---|-------------------|-----------------------|------------------|-----------------|------------|--|
|  | Extension Fitting | 40-38                 | •                |                 | 4072200389 | (1) internal flange; (1) quick-fit coupling with harmonic spring; (1) external flange. Use as a connecting element between quick-fit extensions with harmonic springs and colored floor nozzles and brushes. |
|   |                   | 50                    | •                |                 | 4072200388 |  |
|   |                   | 50-40                 | •                |                 | 4072200387 |  |

| Curved Tube   | Description | Fitment Diameter (mm) | Galvanized Steel | Stainless Steel | Part #  | Notes                |
|---|-------------|-----------------------|------------------|-----------------|---------|----------------------|
|  | Curved Tube | 40                    | •                |                 | 7-21013 | (2) external flanges |
|   |             |                       |                  |                 | •       |                      |
|   |             | 50                    | •                |                 | 7-21012 |                      |
|   |             |                       |                  |                 | •       |                      |
| 70  | •           |                       | 7-21032          |                 |         |                      |

# F. Brushes

| Photo Ref. | Description   | Fitment Diameter (mm) | Principal Width (in.) | Feature        |            |                 |            |            | Material |         |         |          |                  | Part #  | Notes       |   |   |
|------------|---|-----------------------|-----------------------|----------------|------------|-----------------|------------|------------|----------|---------|---------|----------|------------------|---------|-------------|---|---|
|            |   |                       |                       | Overhead clean | Antistatic | Explosion-proof | Food-Grade | High Temp. | Rubber   | Plastic | Chromed | Aluminum | Galvanized steel |         |             | Stainless steel   |   |
| A          | Food-Grade Plastic Dust Brush w/ Swivel Head, in Black. | 38                    | 3                     |                |            |                 | •          |            | •        | •       |         |          |                  |         | 4072200 576 | Nitrile butadiene rubber (NBR) w/ black polypropylene bristles. Also available with <b>red, green, blue, white,</b> and <b>yellow</b> polypropylene bristles. Call Customer Service for Part numbers. |   |
|            |   | 50                    |                       |                |            |                 | •          |            | •        | •       |         |          |                  |         | 4072200 570 |   |   |
|            | Colored Brush Insert Spare Part, in Black.              | 40 & 50               | 3                     |                |            |                 | •          |            | •        | •       |         |          |                  |         | 4072400 264 | Brush insert w/ black polypropylene bristles. Also available with <b>red, green, blue, white,</b> and <b>yellow</b> polypropylene bristles. Call Customer Service for Part numbers                    |   |
| B          | Food-Grade Wall Brush, in Black                         | 40                    | 12                    | •              | •          |                 | •          |            | •        | •       |         |          |                  | •       | •           | 22431602  | With black polypropylene bristles & rubber lip. Also available with <b>blue</b> and <b>yellow</b> polypropylene bristles. Call Customer Service for Part numbers. |
|            |   | 50                    |                       | •              | •          |                 | •          |            | •        | •       |         |          |                  | •       | •           | 22434202  |   |
| C          | Food-Grade Pipe Brush, in Black.                        | 40                    | 4                     | •              | •          |                 | •          |            | •        | •       |         |          |                  | •       | •           | 22430902  | With black polypropylene bristles & rubber lip. Also available with <b>blue</b> and <b>yellow</b> polypropylene bristles. Call Customer Service for Part numbers. |
|            |   |                       |                       | •              | •          |                 | •          |            | •        | •       |         |          | •                | •       | 22431002    |   |   |
|            |   |                       |                       | •              | •          |                 | •          |            | •        | •       |         |          | •                | •       | 22431102    |   |   |
|            |   | 50                    |                       | •              | •          |                 | •          |            | •        | •       |         |          | •                | •       | 22433702    |   |   |
|            |   |                       |                       | •              | •          |                 | •          |            | •        | •       |         |          | •                | •       | 22433802    |   |   |
|            |   |                       |                       | •              | •          |                 | •          |            | •        | •       |         |          | •                | •       | 22433902    |   |   |
| D          | Aluminum Dust Brush                                     | 40                    | 3                     |                |            |                 | •          |            |          | •       |         |          |                  |         | 01719401    | With conductive bristles  |   |
| E          | Wall Brush  | 40                    | 16                    | •              |            |                 |            |            |          | •       |         |          |                  | •       | 7-22195     | Includes bristles, 30° elbow fitting, (1) internal flange, & quick-fit coupling with harmonic spring; PVC construction  |   |
|            |   | 50                    |                       | •              |            |                 |            |            |          | •       |         |          | •                | 7-22198 |             |   |   |

\*NOTE: Part numbers are for black brushes only. Contact customer service for part numbers of other colors. Additional materials and diameters also available.



# G. Finishing Tools

| Photo Ref. | Description            | Fitment Diameter (mm) | Principal Width (in.) | Feature        |            |                 |            |            | Material |         |         |          |                  | Part #  | Notes    |   |
|------------|------------------------|-----------------------|-----------------------|----------------|------------|-----------------|------------|------------|----------|---------|---------|----------|------------------|---------|----------|---|
|            |                        |                       |                       | Overhead clean | Antistatic | Explosion-proof | Food-Grade | High Temp. | Rubber   | Plastic | Chromed | Aluminum | Galvanized steel |         |          | Stainless steel   |
| A          | Crevice Cone           | 38                    | -                     |                |            |                 |            |            | •        |         |         |          |                  |         | 80956200 | Gray; 200mm length  |
|            |                        | 38                    | -                     |                |            |                 | •          |            | •        |         |         |          |                  |         | 80956204 | White; 200mm length   |
|            |                        | 38                    | -                     |                |            |                 | •          |            | •        |         |         |          |                  |         | 80956205 | Yellow; 200mm length  |
| B          | Tapered Crevice Nozzle | 40                    | 0.79 at tip           |                | •          |                 |            |            | •        |         |         |          |                  |         | 7-22142  | Conductive black nitrile rubber; includes a galvanized junction fitting; 300mm length |
|            |                        | 50                    |                       |                | •          |                 |            |            | •        |         |         |          |                  | 7-22141 |          |   |
| C          | Rubber Nozzle          | 40                    | 4.72                  |                |            |                 |            |            | •        |         |         |          | •                |         | 7-22155  | Gray nitrile rubber; oilproof; toothed profile  |
| D          | Rubber Cone            | 50                    | -                     |                |            |                 |            |            | •        |         |         |          |                  |         | 7-21010  | Red nitrile rubber; oilproof  |
| E          | Conductive Rubber Cone | 50                    | -                     |                |            | •               |            |            | •        |         |         |          |                  |         | 40000221 | Black nitrile rubber; oilproof  |
| F          | Short Rubber Cone      | 50                    | -                     |                |            |                 |            |            | •        |         |         |          |                  |         | 80650900 | Gray nitrile rubber; 9.65" length   |

\*Additional diameters, features and materials available. Contact customer service for more information.



# H. Floor Nozzles

| Photo Ref. | Description                       | Fitment Diameter (mm) | Principal Width (in.) | Feature        |            |                 |            |            | Material |         |         |          |                  |                 | Part #  | Notes  |          |
|------------|-----------------------------------|-----------------------|-----------------------|----------------|------------|-----------------|------------|------------|----------|---------|---------|----------|------------------|-----------------|---------|--|----------|
|            |                                   |                       |                       | Overhead clean | Antistatic | Explosion-proof | Food-Grade | High Temp. | Rubber   | Plastic | Chromed | Aluminum | Galvanized steel | Stainless steel |         |  |          |
| A          | Wheeled Floor Nozzle (wet or dry) | 40                    | 12                    |                |            |                 |            |            |          |         |         |          |                  | •               | 7-22171 | Includes (2) rubber squeegees, wheel adjuster screw, & (1) internal flange; a quantity of (2) 8-23000 brush inserts must be purchased separately for dry use |          |
|            |                                   |                       | 16                    |                |            |                 |            |            |          |         |         |          |                  | •               | 7-22030 |  |          |
|            |                                   | 50                    | 12                    |                |            |                 |            |            |          |         |         |          |                  |                 | •       |  | 7-22172  |
|            |                                   |                       | 16                    |                |            |                 |            |            |          |         |         |          |                  |                 | •       |  | 7-22029  |
|            |                                   |                       | 20                    |                |            | •               | •          |            |          |         |         |          |                  |                 | •       |  | 7-22147  |
|            |                                   | 50                    | 16                    |                |            |                 |            |            |          |         |         |          |                  |                 | •       |  | 40000223 |
|            | Additional Squeegee Inserts (wet) | -                     | 12 & 16               |                |            |                 |            |            |          |         |         |          |                  | •               | 8-20086 | Includes (1) piece   |          |
|            |                                   | -                     | 20                    |                |            |                 |            |            |          |         |         |          |                  | •               | 8-20087 | Includes (1) piece   |          |
|            | Additional Brush Inserts (dry)    | -                     | 12 & 16               |                |            |                 |            |            |          |         |         |          |                  | •               | 8-23000 | Includes (1) piece   |          |
|            |                                   | -                     | 20                    |                |            |                 |            |            |          |         |         |          |                  | •               | 8-23016 | Includes (1) piece   |          |

\*Additional diameters, features and materials available. Contact customer service for more information.



**Reminder: Only the most popular accessories are represented. Contact us for additional diameters, materials and more.**

# I. Explosion-Proof / Dust Ignition-Proof Accessories

## Couplers, Reducers and Wands

Inlet couplers, reducers and wands safe for use with explosion-proof/dust ignition-proof vacuums are listed in sections C. and F. Refer to stainless steel and aluminum parts.

| Antistatic Hose & Cuffs   | Description   | Fitment Diameter (mm) | Bend Radius | Temp. Rating °F                | Part #   | Notes   |
|---|---|-----------------------|-------------|--------------------------------|----------|---|
|  | 40mm Conductive ( $\leq 10^4$ ohms) Polyurethane Hose (per meter) | 40                    | 3.48 in.    | -22 / 195; intermittent to 260 | 7-24115  | Spring steel wire with carbon-impregnated polyurethane coating; $10^4$ ohms resistance; Max. order length: 15 meters. |
|   | 40mm Antistatic Hose Cuff   |                       |             |                                | 40000212 | Use with 7-24115 hose   |
|   | 50mm Conductive ( $\leq 10^4$ ohms) Polyurethane Hose (per meter) | 50                    | 4.68 in.    | -22 / 195; intermittent to 260 | 7-24116  | Spring steel wire with carbon-impregnated polyurethane coating; $10^4$ ohms resistance; Max. order length: 15 meters. |
|   | 50mm Antistatic Hose Cuff   |                       |             |                                | 7-20309F | Use with 7-24116 hose   |

| Photo Ref. | Finishing Tools and Brushes for Hazardous Locations | Fitment Diameter (mm) | Principal Width (in.) | Construction Type |                 | Part #   | Notes  |
|------------|---|-----------------------|-----------------------|-------------------|-----------------|----------|--|
|            |   |                       |                       | Aluminum          | Stainless Steel |          |  |
| A          | Wheeled Floor Nozzle                                | 50                    | 16                    |                   | •               | 40000223 | Includes (2) silicone squeegees, wheel adjuster screw, & (1) internal flange |
| B          | Conductive Rubber Cone                              | 40                    | -                     |                   |                 | 40000214 | Black nitrile rubber; oilproof   |
|            |   | 50                    |                       |                   |                 | 40000221 |  |
| C          | Conductive Rubber Nozzle                            | 50                    | 4.72                  |                   |                 | 7-21080  | Black nitrile rubber; oilproof; toothed profile                              |
| D          | Crevice Nozzle                                      | 40                    | -                     |                   | •               | 40000213 | (1) external flange; 20"-length  |
|            |   | 50                    |                       |                   | •               | 40000220 |  |
| E          | Aluminum Crevice Nozzle                             | 38                    | -                     | •                 |                 | 01768900 | 11"-length   |
| F          | Aluminum Dust Brush                                 | 38                    | 3                     |                   | •               | 01719401 | With conductive bristles   |
|            |   | 50                    |                       |                   | •               | M50058   |  |
| G          | EXP Pipe Brush                                      | 38                    | 4                     |                   | •               | M50038   | With black bristles  |
|            |   | 50                    |                       |                   | •               | M50042   |  |
|            |   | 38                    | 8                     |                   | •               | M50039   |  |
|            |   | 50                    |                       |                   | •               | M50043   |  |
|            |   | 38                    | 12                    |                   | •               | M50040   |  |
|            |   | 50                    |                       |                   | •               | M50044   |  |
| H          | EXP Wall Brush                                      | 38                    | 12                    |                   | •               | M50041   | -  |
|            |   | 50                    |                       |                   | •               | M50045   |  |



## J. Overhead Cleaning Kits

| Photo Ref. | Description           | Fitment Diameter (mm) | Kit Includes   | Individual Part #  | Full Kit Part # |
|------------|-----------------------|-----------------------|--|--|-----------------|
| A          | Overhead Cleaning Kit | 38                    | 3 Meters of Black Conductive Plastic Hose<br>(2) Conductive Hose Cuffs<br>(2) 5' Food Grade Aluminum Extension Wands<br>Curved Food Grade Aluminum Extension Wand<br>(2) Compression Couplings<br>12" Blue Wall Nozzle<br>8" Blue Pipe Brush<br>3" Blue Dust Brush | 01716200<br>01716300<br>01769300<br>01769310<br>01769350<br>22431607<br>22431007<br>10950203 | 01760440        |
|            |                       | 50                    | 4 Meters of Black Conductive Plastic Hose<br>(2) Conductive Hose Cuffs<br>(2) 5' Food Grade Aluminum Extension Wands<br>Curved Food Grade Aluminum Extension Wand<br>(2) Couplers<br>12" Blue Wall Nozzle<br>8" Blue Pipe Brush<br>3" Blue Dust Brush              | 01716400<br>01716500<br>01769320<br>01769330<br>20659000<br>22434207<br>22433807<br>10643200 | 01760445        |

## K. Hot Oven Cleaning Kits

| Photo Ref.                   | Description           | Fitment Diameter (mm) | Kit Includes                                    | Individual Part # | Full Kit Part # |
|------------------------------|-----------------------|-----------------------|---|-------------------|-----------------|
| B                            | Hot Oven Cleaning Kit | 50                    | 5 Meters of 40 mm hose with 50mm inlet fitting  | 4072200556        | 01760451        |
|                              |                       |                       | (2) Aluminum Extension Wands                    | 7-22386           |                 |
|                              |                       |                       | 16" oven nozzle                                 | 7-22272           |                 |
|                              | Hot Oven Cleaning Kit | 70                    | 5 Meters of 40 mm hose with 70 mm inlet fitting | 4072200555        | 01760452        |
| (2) Aluminum Extension Wands | 7-22386               |                       |   |                   |                 |
| 16" oven nozzle              | 7-22272               |                       |   |                   |                 |



## Safe Choice Commitment

At Nilfisk Industrial Vacuums we understand that you face many risks each day, just by operating your business. That is why Nilfisk is dedicated to helping you make smart choices to keep your facility and your workers safe. Our team of experts is ready to tackle any cleaning challenge – because in a world full of risk, you have to make safe choices.

We are committed to being that safe choice. To learn more visit [nilfiskindustrialvacuums.com](http://nilfiskindustrialvacuums.com).